

SAFETY TAPES & PIPE PROTECTION TAPES
SIKKERHEDS TAPE & RØR BESKYTTELSES TAPE



@ www.nos-as.dk



OFFSHORE
Equipment & Services



OFFSHORE Equipment & Services

TAPE - DRIP STOP - PIPE REPAIR - REFLECTIVE - ANTI-CORROSION TAPE - PRIMER PASTE - MASTIC - ANTI-SPLASHING - HATCH COVER - MAGNETIC HATCH COVER - PIPE DRESSING
TAPE - DRYP STOP - REPERATIONS - REFLEKS - ANTI-KORROSIONSTAPE - PRIMER PASTA - MASTIK - ANTI-SPLASHING - LUGE TAPE - MAGNETISK LUGE TAPE - RØRFORSEGLER

INDEX

- DRIP STOP TAPE
- RETRO REFLECTIVE TAPE
- ANTI CORROSION TAPE
- ANTI CORROSION PRIMER PASTE
- ANTI CORROSION MASTIC
- ANTI-SPLASHING FLANGE - SHIELDS
- ANTI-SPLASHING TAPE
- HATCH COVER TAPE - STRIPS & ROLLS
- MAGNETIC HATCH COVER TAPE
- PIPE DRESSING

INDHOLDSFORTEGNELSE

- DRYP STOP TAPE
- RETRO REFLEKSTAPE
- ANTI KORROSIONSTAPE
- ANTI KORROSIONS PRIMER PASTA
- ANTO KORROSIONSMASTIK
- ANTI-SPLASHING FLANGSE - SKJOLDE
- ANTI-SPLASHING TAPE
- LUGE TAPE - STYKKER & RULLER
- MAGNETISK LUGE TAPE
- RØRFORSEGLER



OFFSHORE Equipment & Services

TAPE - DRIP STOP - PIPE REPAIR - REFLECTIVE - ANTI-CORROSION TAPE - PRIMER PASTE - MASTIC - ANTI-SPLASHING - HATCH COVER - MAGNETIC HATCH COVER - PIPE DRESSING TAPE - DRYP STOP - REPERATIONS - REFLEKS - ANTI-KORROSIONS TAPE - PRIMER PASTA - MASTIK - ANTI-SPLASHING - LUGE TAPE - MAGNETISK LUGE TAPE - RØRFORSEGLER

DRIP STOP TAPE

- Can be applied under water and self-adhesive closing within 20-30 min. by taping several overlaps
- Can be used on all materials
- Seals leaks with a pressure of up to 4 bars at the spot
- Easy to use and non-sticking to hands

DRYP STOP TAPE

- Kan påføres under vand og fuld selvklæbe indenfor 20-30 min. ved gentagende overlaping
- Kan bruges på alle materialer
- Forsegler lækager med et tryk på op til 4 bar på stedet
- Nem at bruge og klister ikke til hænderne



Art. No.	Thickness	Width	Length	Rolls/box	Impa No.
15 010001	0,5mm	25mm	10m	20	812491
15 010002	0,5mm	38mm	10m	15	812492
15 010003	0,5mm	50mm	10m	10	812493

Note! When being used in wet areas, wrap tightly with hand to avoid water interference between the tape and the leakage area. Overlap should be approx. ½ the width of the tape.

Note! Når det bruges i vådområder, pak det tæt med hænderne for at undgå vand mellem tape og lækage området. Overlapping bør være ca. Det halve af tapens bredde.

PIPE REPAIR TAPE

- It's corrosion preventive, reinforcing, electrical protected up to 16.000 volts and can be applied under water
- Functional under intermittent temperatures up to 250 °C
- Applied on fuels like oil or diesel, will not affect the material

REPERATIONS TAPE VANDAKTIVERET

- Det er korrosionshindrende, forstærkende, strøm beskyttet op til 16.000 volt og kan påføres under vand
- Funktionel ved intermitterende temperaturer op til 250 °C
- Påført på brændstoffer som olie eller diesel, vil ikke påvirke materialet



Art. No.	Width	Length	IMPA no.	ISSA no.
15 020001	50mm	1,5m	812364	75.588.01/02
15 020002	75mm	2,7m	812364	-
15 020003	100mm	4,5m	-	75.588.04

Note! Gloves and epoxy stick is included in the package. Also available in 150mm width on request!

Note! Handsker og epoxy stick er inkluderet I pakken. Også muligt i en 150mm bredde på forespørgelse!



OFFSHORE Equipment & Services

TAPE - DRIP STOP - PIPE REPAIR - REFLECTIVE - ANTI-CORROSION TAPE - PRIMER PASTE - MASTIC - ANTI-SPLASHING - HATCH COVER - MAGNETIC HATCH COVER - PIPE DRESSING
 TAPE - DRYP STOP - REPERATIONS - REFLEKS - ANTI-KORROSIONS TAPE - PRIMER PASTA - MASTIK - ANTI-SPLASHING - LUGE TAPE - MAGNETISK LUGE TAPE - RØRFORSEGLER

RETRO REFLECTIVE TAPE

- High reflectivity in a wide range of angles
- White reflectors covered with a 55 micron Polyurethane film



RETRO REFLEKS TAPE

- Høj refleksion fra flere forskellige vinkler
- Hvide reflekser beskyttet af en 55 Micron Polyuretan film



Art. No.	Width	Length	Rolls/box	Impa No.	ISSA No.
15 030001	50mm	45,7m	12	33 0189	4700704
15 030002	50mm	45,7m	21	33 0189	4700704



Initial Retroreflectivity:

(cd/lx/m²)

Observation Angle	12'		20'	
Entrance Angle	5°	30°	5°	20°
Solasflex	250	150	180	100

Approved with the Wheelmark approval by German Lloyds & has USCG approval.
 Conforms to IMO Res. A.658 (16).



OFFSHORE Equipment & Services

TAPE - DRIP STOP - PIPE REPAIR - REFLECTIVE - ANTI-CORROSION TAPE - PRIMER PASTE - MASTIC - ANTI-SPLASHING - HATCH COVER - MAGNETIC HATCH COVER - PIPE DRESSING
TAPE - DRYP STOP - REPERATIONS - REFLEKS - ANTI-KORROSIONS TAPE - PRIMER PASTA - MASTIK - ANTI-SPLASHING - LUGE TAPE - MAGNETISK LUGE TAPE - RØRFORSEGLER

ANTI CORROSION TAPE

PETROLATUM-BASED

- Can be applied on wire-brushed surfaces
- Repels water, salt, alkalis and acids
- Will not crack, peel or harden
- Non-toxic and environmental friendly (Meets AWWA C217 Standard)
- Temperature variances from -40°C to + 84°C

ANTI KORROSIONS TAPE

PETROLATUM-BASERET

- Kan påføres på børstet overfalder
- Vand, salt, syre og base afvisende
- Det hverken sprækker, skaller eller hærdes
- Ugiftig og miljøvenlig (I henhold til AWWA C217 Standard)
- Brugbar i temperaturer fra -40°C til +84°C



Art. No.	Width	Length	Rolls/box	IMPA code
15 040001	50mm	10m	36	81 2471
15 040002	100mm	10m	18	81 2472
15 040003	150mm	10m	12	81 2473
15 040004	200mm	10m	8	81 2474

ANTI-CORROSION PRIMER PASTE

- Color: brown
- Used on moist surfaces, so that the tape bonds optimally

ANTI-KORROSIONS PRIMER PASTA

- Farve: brun
- Bruges på fugtige overflader, så tapen binder optimalt

Art. No.	Tubes/Carton
15 040005	6 x 2 kg



ANTI-CORROSION MASTIC

- Color: brown
- Used to fill out irregularities on surfaces, prior to the wrapping

ANTI-KORROSIONS MASTIK

- Farve: brun
- Bruges til at fylde evt. ujævnheder i overfladen, inden indpakning

Art. No.	Tubes/Carton
15 040006	8 x 3 kg





OFFSHORE Equipment & Services

TAPE - DRIP STOP - PIPE REPAIR - REFLECTIVE - ANTI-CORROSION TAPE - PRIMER PASTE - MASTIC - ANTI-SPLASHING - HATCH COVER - MAGNETIC HATCH COVER - PIPE DRESSING
 TAPE - DRYP STOP - REPERATIONS - REFLEKS - ANTI-KORROSIONS TAPE - PRIMER PASTA - MASTIK - ANTI-SPLASHING - LUGE TAPE - MAGNETISK LUGE TAPE - RØRFORSEGLER

ANTI-SPLASHING FLANGE SHIELDS

- Re-useable

ANTI-SPLASHING FLANGSE SKJOLDE

- Kan genbruges



Art. No.	Width	Length	Rolls/box	Typically used on
15 05 0001	100mm	5m	3	Flanges with a 25-50mm pipe dia.
15 05 0002	150mm	5m	2	Flanges with a 50-100mm pipe dia.
15 05 0003	100mm	5m	1	Flanges with a 100mm pipe dia. and up

Meets SOLAS Regulation II - 2/15.2.11

I henhold til SOLAS regulativ II - 2/15.2.11

ANTI-SPLASHING TAPE

- Temp. Range up to 150°C
- Pressure = up to over 35 bar

ANTI-SPLASHING TAPE

- Arbejds temp. Op til 150°C
- Tryk = op til over 35 bar

Before:

After:



Art. No.	Width	Length	Rolls/box	IMPA code
15 06 0001	35mm	10m	28	87 1801
15 06 0002	50mm	10m	20	87 1802
15 06 0003	100mm	10m	12	87 1804
15 06 0004	140mm	10m	7	87 1803
15 06 0005	250mm	10m	4	87 1807
15 06 0006	500mm	10m	2	87 1805
15 06 0007	1000mm	10m	1	87 1806

Meets SOLAS regulation II - 2/15.2.11

I henhold til SOLAS regulative II - 2/15.2.11

Approved By / Godkendt Af:





OFFSHORE Equipment & Services

TAPE - DRIP STOP - PIPE REPAIR - REFLECTIVE - ANTI-CORROSION TAPE - PRIMER PASTE - MASTIC - ANTI-SPLASHING - HATCH COVER - MAGNETIC HATCH COVER - PIPE DRESSING
TAPE - DRYP STOP - REPERATIONS - REFLEKS - ANTI-KORROSIONS TAPE - PRIMER PASTA - MASTIK - ANTI-SPLASHING - LUGE TAPE - MAGNETISK LUGE TAPE - RØRFORSEGLER


HATCH COVER TAPE STRIPS& ROLLS

- Heavy duty hatch cover tape
- High adhesive mastic



Strips/Stykker:

Art. No.	Width	Length	Strips/box	Total length/carton	IMPA code
15 070001	110mm	1,22m	30	36m	23 2462
15 070002	152mm	1,22m	30	36m	23 2463

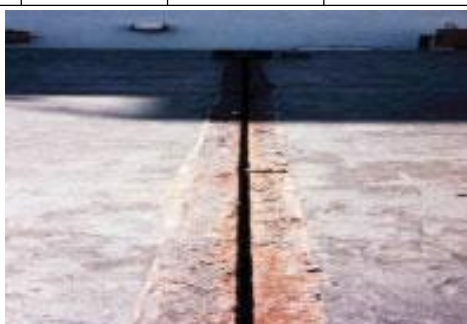

LUGE TAPE STYKKER & RULLER

- Slidstærk luge tape
- Mastik med høj klæbeevne



Rolls/Ruller:

Art. No.	Width	Length	Rolls/box	Total length/carton	IMPA code
15 070003	100mm	20m	3	60m	23 2452
15 070004	150mm	20m	2	40m	23 2453

MAGNETIC HATCH COVER TAPE

- Easy positioning without any additional mountings and tools
- No cleaning of the hatches, no adhesive coat residues
- Re-useable

Contact for more information on magnetic hatch cover tape!

Art. No.	Length and width
15 07 xxxx	On customers requirements

MAGNETISK LUGE TAPE

- Nem tilpasning, uden brug af yderligere beslag eller værktøj
- Ingen rengøring af lugerne, ingen rester fra klæberigt materialer
- Kan genbruges

Kontakt os, for mere information om magnetiske luge tape!





OFFSHORE Equipment & Services

TAPE - DRIP STOP - PIPE REPAIR - REFLECTIVE - ANTI-CORROSION TAPE - PRIMER PASTE - MASTIC - ANTI-SPLASHING - HATCH COVER - MAGNETIC HATCH COVER - PIPE DRESSING
TAPE - DRYP STOP - REPERATIONS - REFLEKS - ANTI-KORROSIONS TAPE - PRIMER PASTA - MASTIK - ANTI-SPLASHING - LUGE TAPE - MAGNETISK LUGE TAPE - RØRFORSEGLER

PIPE DRESSING

- Doesn't crack, peel or harden
- Non-flammable

RØRFORSEGLER

- Hverken revner, skaller eller hærdes
- Ikke brandbar



Art. No.	Temp. Range	Color	Weight/Pail	Dry to touch	Thickness Application	Coverage	IMPA code
15 080001	-40°C to +230°C	Maroon	16kg	24 Hours	3-4 mm	0.5 m2/kg	45 0791